

VERMENTINO



Lampadaire aluminium (4 - 8 m) et applique
Construction intégralement sans soudure

Tête de mât

- . Bras Vermentino en profil aluminium extrudé avec réservation pour accueillir le luminaire
- . Tête de mât simple ou double
- . Longueur de 0,50 m, 1 m ou 1,50 m (autre sur demande)

Mât

- . Profil aluminium spécifique de section rectangulaire
- . Section 200 x 120 mm

Porte de visite

- . Affleurante et interchangeable
- . Passage 500 x 90 mm à 600 mm de la base (autre hauteur possible)

Semelle


- . En fonderie d'aluminium
- . Encombrement 400 x 400 mm
- . Entraxe 300 x 300mm
- . Bagues isolantes au droit des 4 oblongs d'ancrage pour éviter tout contact avec les tiges en acier galvanisé

Finition

- . Thermolaquage par poudre polyester : coloris RAL ou finitions spéciales
- . Anodisation incolore, bronze(s), noir (20 microns)

Module LED Technilum

- . Kômino - p [180](#)

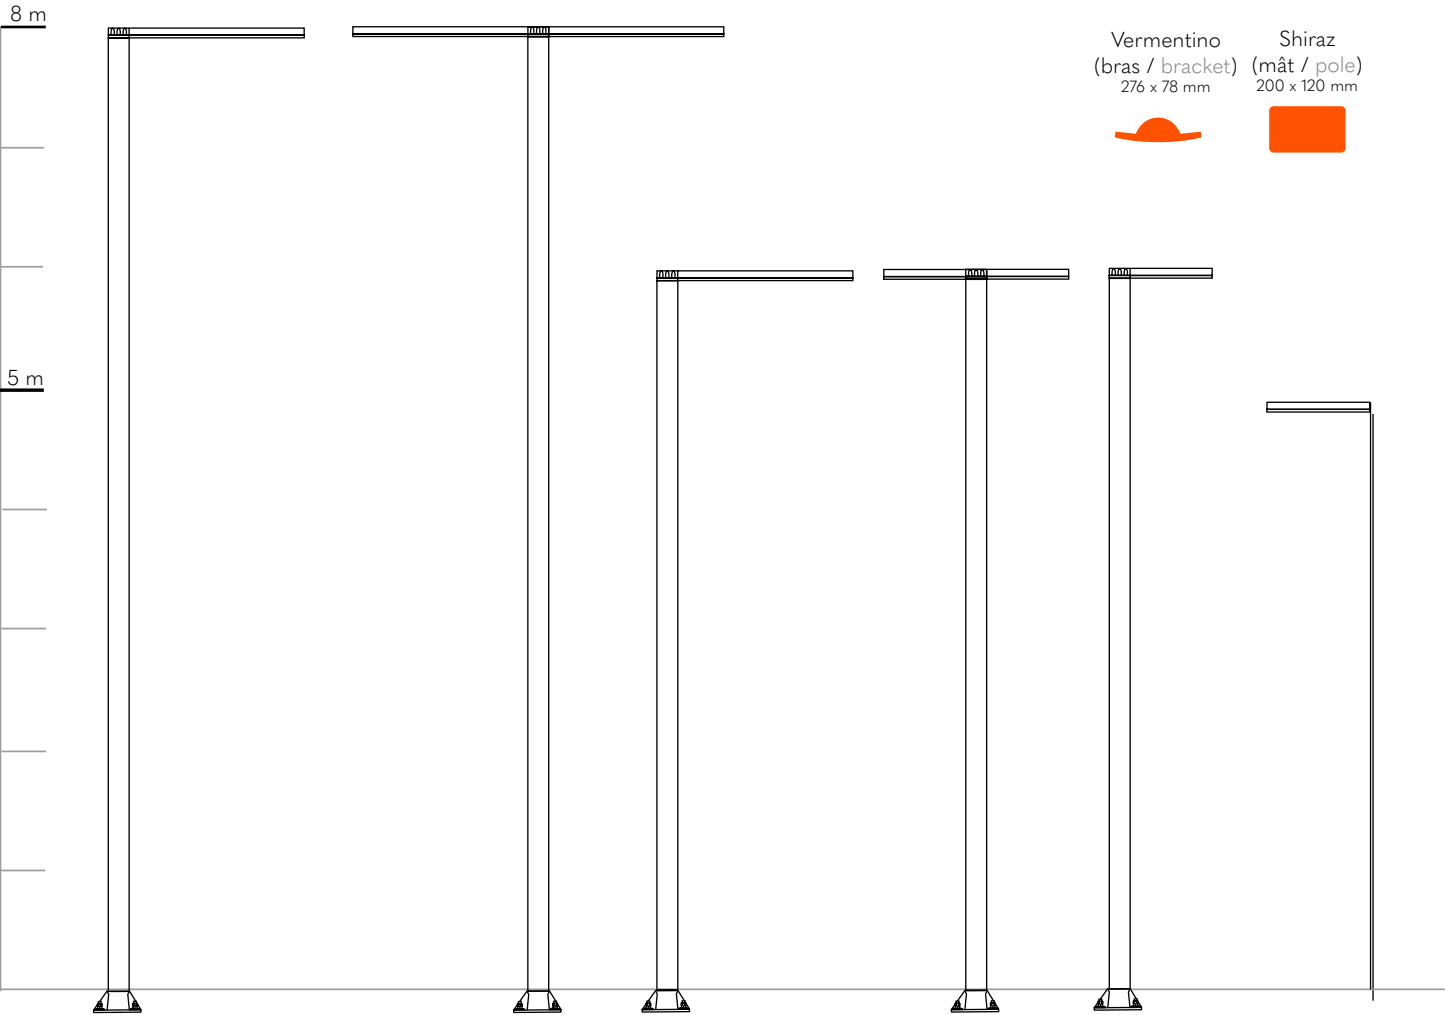

Quais, Cap d'Agde (FR)
Maîtrise d'ouvrage / Contracting authority: Ville d'Agde

© Hugo Da Costa



VERMENTINO



Aluminum lamp post (4 - 8 m) and wall-mounted light, entirely weld-free

Pole top

- . Vermentino bracket made of extruded aluminum profile, with a reserve to place the luminaire
- . Single or double bracket
- . Length: 0.50, 1 or 1.50 m (other upon request)

Pole

- . Exclusive rectangular aluminum profile
- . Section 200 x 120 mm

Access door

- . Flush, interchangeable
- . Passage 500 x 90 mm at 600 mm from the base (other height possible)

Baseplate

- . Made of die-cast aluminum
- . Dimensions 400 x 400 mm
- . Fixing distance 300 x 300 mm
- . Insulating rings on the 4 anchoring oblongs to avoid any contact with galvanized steel bolts

Finish

- . Polyester powder coating, RAL colors or special finish
- . Natural, bronze(s) or black anodization (20 microns)

Technilum LED fixture

- . Kômino - p [180](#)



Bras Vermentino

Quais, Cap d'Agde (FR)

Maîtrise d'ouvrage / Contracting authority: Ville d'Agde

© Hugo Da Costa